




4275

EMERGENCY SHOWERS AND EYEWASHES - SHOWERS / EYEWASHES

Shower and Eyewash, wall recessed mounting, ABS shower head

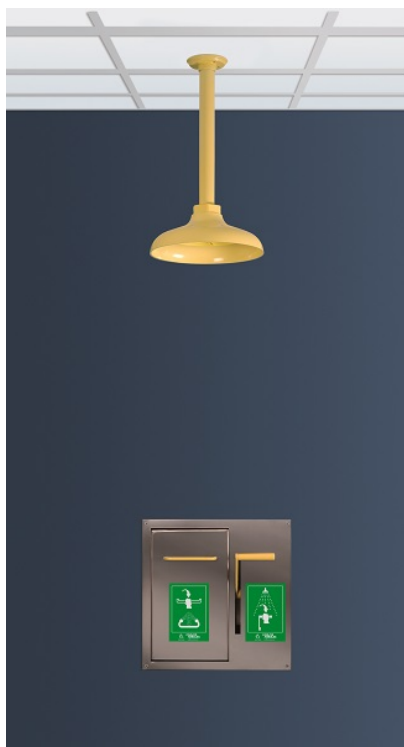

GENERAL FEATURES

MATERIALS: Galvanized steel piping. Brass fittings.

ANTICORROSIVE PLASTIC COATING: Polyamide with a thickness of 250-300 microns, in high-visibility yellow color.

WATER INLET: Female thread ISO 228 G1"

WATER INLET PRESSURE: Recommended 3 bar

SHOWER

MATERIALS: Shower head in ABS plastic.

FLOW RATE: Regulated at 110 l/min.

OPERATION: Lever.

VALVE: Full bore valve 1"

EYEWASH

MATERIALS: Eyewash assembly in polyamide plastic coated brass. Two high-flow aerated water sprays at low pressure. Eyewash cabinet in stainless steel.

FLOW RATE: 20 l/min at 3 bar.

OPERATION: Pull cabinet door.

VALVE: Special valve

WASTE: Male thread ISO 228 G1-1/2"

PACKING

Weight: 8.5 kg

Dimensions: 63 x 54 x 38 cm