




# 3820

EMERGENCY SHOWERS AND EYEWASHES - EYEWASHES

Swing down Eyewash, swivel opening, wall mounting, without bowl

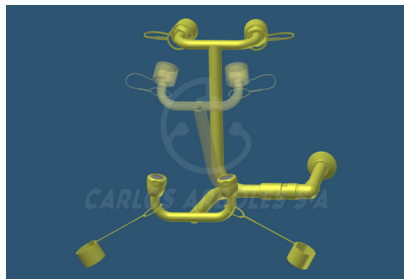

## GENERAL FEATURES

*MATERIALS: Brass fittings.*

*ANTICORROSIVE PLASTIC COATING: Polyamide with a thickness of 250-300 microns, in high-visibility yellow color.*

*WATER INLET: Male thread ISO 228 G1/2"*

*WATER INLET PRESSURE: Recommended 3 bar*

## EYEWASH

*MATERIALS: Eyewash assembly in polyamide plastic coated brass. Two high-flow aerated water sprays at low pressure with automatic opening anti-dust cover.*

*FLOW RATE: 20 l/min at 3 bar.*

*OPERATION: Swing down the Eyewash.*

*VALVE: Special valve*

## PACKING

*Weight: 2 kg*

*Dimensions: 51 x 36 x 13 cm*