




1275

EMERGENCY SHOWERS AND EYEWASHES - SHOWERS

Wall recessed Shower, ABS shower head

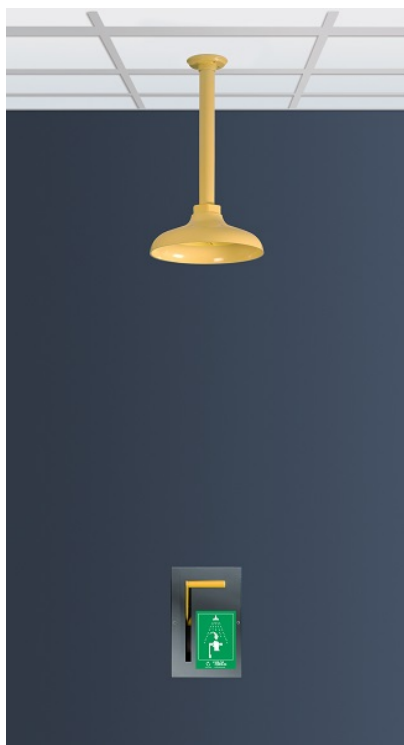

GENERAL FEATURES

MATERIALS: Galvanized steel piping. Brass fittings.

ANTICORROSIVE PLASTIC COATING: Polyamide with a thickness of 250-300 microns, in high-visibility yellow color.

WATER INLET: Male thread ISO 228 G1"

WATER INLET PRESSURE: Recommended 2 bar / Min. 1.5 bar / Max. 8 bar

SHOWER

MATERIALS: Shower head in ABS plastic.

FLOW RATE: Regulated at 110 l/min.

OPERATION: Lever.

VALVE: Full bore valve 1"

PACKING

Weight: 4.5 kg

Dimensions: 52 x 37 x 29 cm