




# 1275 SS

EMERGENCY SHOWERS AND EYEWASHES - SHOWERS

## Wall recessed Shower, SS shower head

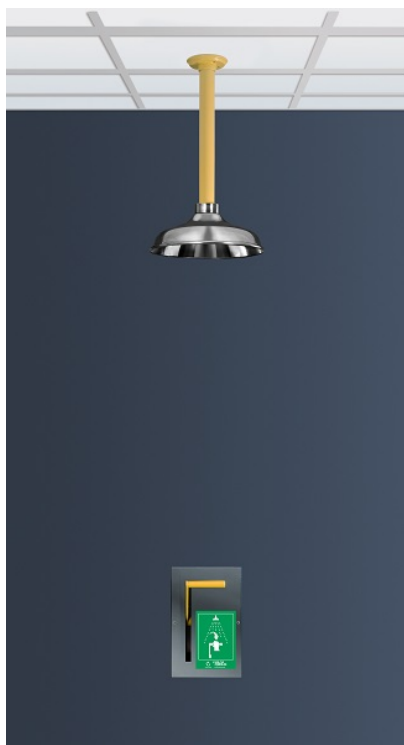

### GENERAL FEATURES

*MATERIALS: Galvanized steel piping. Brass fittings.*

*ANTICORROSIVE PLASTIC COATING: Polyamide with a thickness of 250-300 microns, in high-visibility yellow color.*

*WATER INLET: Male thread ISO 228 G1"*

*WATER INLET PRESSURE: Recommended 2 bar / Min. 1.5 bar / Max. 8 bar*

### SHOWER

*MATERIALS: Shower head in stainless steel.*

*FLOW RATE: Regulated at 110 l/min.*

*OPERATION: Lever.*

*VALVE: Full bore valve 1"*

### PACKING

*Weight: 6 kg*

*Dimensions: 52 x 37 x 29 cm*